



YOUR ROOFING SOLUTION

FACTORY ADDRESS

SJ CLASSIC INDUSTRIES SDN. BHD. (434775-H)
Kg Parit Ju, Mk 4, Simpang Kiri, 83050 Batu Pahat, Johor

Telephone Number

07- 418 8888
07- 418 8889
07- 418 8880
07- 418 5852
07- 418 5853

Fax Number

07- 418 5854
07- 418 6333

Website

sengdek.com

Email

enquiry@sjclassic.com

SUPERRIB ROOFING



SENGDEK SUPERRIB ROOFING


SENGDEK SuperRib is one of SJ Classic signature products. Its effectively long width and architectural design make it suitable and ideal for the needs of commercial, industrial, residential or any building project roofing and wall cladding. SuperRib is formed and made from the highest quality of steel coil available in a range of coating either PPGI (Pre-painted Galvanized Coated Steel) or Aluzinc (Hot-Dipped Aluminium Coated-Steel).

SENGDEK SuperRib is the most popular metal roofing sheet in Malaysia. Its benefits include easy-to-install and excellent durability. User-friendly SuperRib can be customized to any specific length, leading any building project to cost-saving and minimize environmental impact rooted by material waste.


SUPERRIB CRIMP CURVE



SuperRib Crimp Curve is best suited for any awning or metal works. It has been widely used in any corner of Malaysia to provide roofing solution for users. Its innovative design and aesthetical appearance meet the best of modern metal roofing technology. It can be customized into standard curve, semi-curve or any special design crimp curve.




Minimum Distance (H) : 650mm
Minimum Distance (W) : 1300mm



Minimum Distance (A) : 400mm
Minimum Distance (B) : 20mm
Minimum Radius (C) : 270mm

PROFILE: SENGDEK SUPERRIB

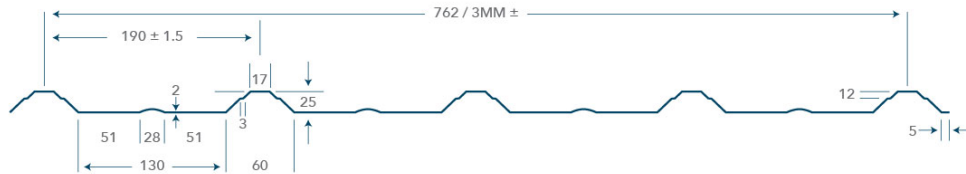

DIMENSION	TOLERANCE
RIB HEIGHT : 25MM	THICKNESS OF MATERIAL : ±0.03MM
EFFECTIVE COVER : 762MM	EFFECTIVE WIDTH : ±3MM
MINIMUM ROOF PITCH : 5°	FINISHING LENGTH : ±5MM
STEEL STANDARD : MS2383 (COLOUR) / MS1196 (BARE)	

THICKNESS AVAILABLE CHART			
BASE METAL THICKNESS (BMT)	TOTAL COATED THICKNESS (TCT)	WEIGHT (kg/m²)	MIN. YIELD STRENGTH (Mpa)
0.20MM	0.24MM	1.99	G300/G550
0.25MM	0.30MM	2.46	G300/G550
0.30MM	0.35MM	2.93	G300/G550
0.35MM	0.40MM	3.46	G300/G550
0.42MM	0.47MM	4.20	G300/G550
0.48MM	0.53MM	4.76	G300/G550

DATA SHEET

RECOMMENDED MAXIMUM ROOF LENGTH (M)			
SLOPE IN DEGREE	3°	5°	7°
RAINFALL (mm/h)			
150	50	60	80
200	39	50	60
250	30	40	48
300	26	30	40


RECOMMENDED MAXIMUM SPACING OG SUPPORT					
BASE METAL THICKNESS (mm)	TOTAL COATED THICKNESS (mm)	ROOF		WALL	
		END SPAN(mm)	INTERNAL SPAN(mm)	END SPAN(mm)	INTERNAL SPAN(mm)
0.35	0.40	900	1000	1200	1500
0.42	0.47	1200	1500	1700	2000
0.48	0.53	1300	1700	2000	2300

SAMPLE OF SPECIFICATION


0.42MM BMT (THICKNESS) SENGDEK SuperRib Metal Roofing Sheets in pre-painted hot-dipped zinc-coated steel or hot-dipped zinc-aluminium alloy-coated steel to be fixed with / without insulation, and come complete with necessary fitting and accessories. Details in accordance with manufacturer's instructions.

STANDARD ACCESSORIES STANDARD FLASHING / CAPPING


RIDGE CAPPING SC12




RIDGE CAPPING SC18




RIDGE CAPPING SC24




V CAPPING SC12




V CAPPING SC18




V CAPPING SC24




FLASHING A SC12




FLASHING A SC18




FLASHING A SC24




FLASHING B SC12




FLASHING B SC18




FLASHING B SC24




FLASHING C SC12




FLASHING C SC18




FLASHING C SC24




FASCIA SC9




FASCIA SC18




FASCIA SC24




FASCIA 3' SC6



VALLEY SC18



VALLEY SC24



(ALL UNITS ARE MEASURED IN MM)

TRUST US WITH CSC



SENGDEK roofing are supplied by top quality local steel coil manufacturer, CSC. CSC was established and listed on the main market of Bursa Malaysia. It is the largest steel coil manufacturer in Malaysia. The main products of CSC steel include galvanised steel coils (gi) and pre-painted steel coil (ppgi).

Realzinc and Realcolor are shaped under CSC, providing the best quality of steel coil to create infinite possibilities.

The concept of "real" is originated from value of reality and practicality which closely aligned with CSC upright business philosophy, besides communicating the company's management ways by "making with real and achieving the real". It also highlights the company's ambitious in providing steel products that meets the quality standard.

RETAIL SEGMENT

Cahaya
realcolor

Primero
realcolor

PROJECT SEGMENT

Primero
realcolor

Thermoshield
realcolor

Supreme
realcolor